

GOAL ZERO  
**YETI150** SOLAR GENERATOR

A plug-and-play generator for emergencies, camping, or wherever you need power. The GOAL ZERO Yeti 150 Solar Generator is a great solution to keep lights, phones and laptops powered on through any situation.



HOW IT CHARGES



FROM THE SUN  
12 Hours



FROM THE WALL  
5 Hours



FROM 12 VOLT  
8 Hours

WHAT IT POWERS



12V LIGHT  
50+ Hours



SMARTPHONE  
15 Recharges



TABLET  
6 Recharges



LAPTOP  
2 Recharges

USB, 12V and AC powered devices like:  
Smartphones, Lights, Laptops, AND MORE

# GOAL ZERO **YETI150** SOLAR GENERATOR



Power Your Camp



Power Your Emergency




Power Your Life

## HOW IT WORKS



- A** Charging Port
- B** Charging Indicator Light
- C** Battery Display
- D** Backlight for Display
- E** 12 V Ports
- F** USB Ports
- G** AC Ports

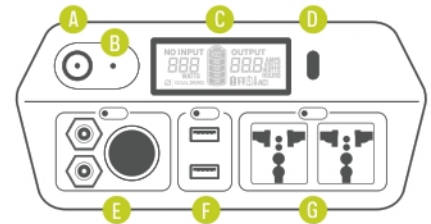

## TECHNICAL SPECIFICATIONS

### CHARGE TIME:

- Wall charger: 6 Hrs
- Car Charger: 8 Hrs
- Nomad 13: 26-52Hrs
- Nomad 26: 13-26Hrs
- Boulder 15: 22-44Hrs
- Boulder 30: 11-22Hrs

### BATTERY:

- Type: AGM Lead Acid
- Capacity: 168Wh (12V, 14Ah)
- Management system: Charging and low-battery protection built in

### OUTPUTS:

- USB port: 5V, up to 2.1A (10W)
- 12V port (6.0mm): 12V, up to 10A (120W)
- 12V car port: 12V, up to 10A (120W)
- AC Inverter: 220V, 0.7A, (80W continuous, 160W max), modified-sine wave

### INPUT:

- Charging port: 14-29V, up to 5A (60W)

### GENERAL:

- Weight: 12lbs (5.4kg)
- Dimensions: 7.75 x 5.75 x 6.75in (19.7 x 14.6 x 17.2)
- Certs: (display icons) CE, FCC, RoHS